

## REACH IN FREEZER

D55F-GS2

Bottom Mounted / 2 Glass Door



#### 1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config. NEMA5-15P



### **PRODUCT FEATURES**

- The compressor is mounted in the bottom for better heat evaporation.
- B.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com


www.DukersUSA.com

# **DETAILS & SPECIFICATIONS**

D55F-GS2

Front View

55 1/8"  Side View

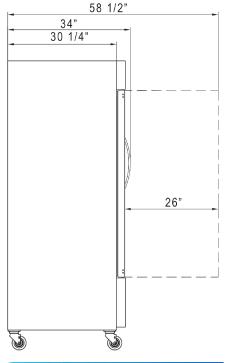

#### **MODEL D55F-GS2**

Rated Voltage 115V Rated Frequency 60Hz **Total Input Power** 1065W **Total Current** 5.3A 14.7kW.h/24h **Energy Consumption Total Capacity** 40.74 cu ft **Climatic Category Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side** 150 PSIG **Insulation Blowing Gas C-Pentane** R290/8.82oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D55F-GS2	55 1/8 x 34 x 80 3/8	57 1/8 x 36 x 82 3/8	506 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com