



REACH IN REFRIGERATOR

D83AR

Top Mounted / 3-Solid Door



1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F 33 ~ 41°F
Compressor Power (HP) 1/2+
Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- B.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- **W** Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

info@dukersusa.com


www.DukersUSA.com

DETAILS & SPECIFICATIONS

D83AR

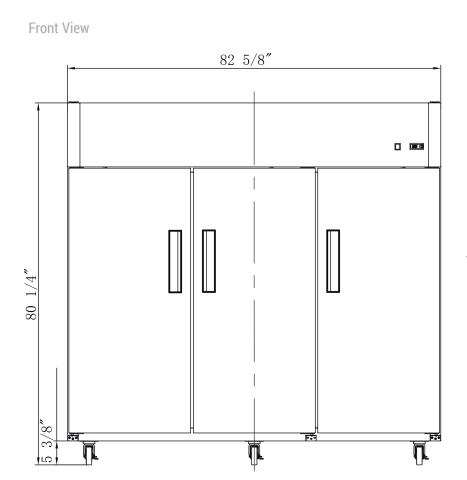

Side View



MODEL D83AR

Rated Voltage Rated Frequency **Total Input Power Total Curren Total Capacity Climatic Category Protection Type Design Pressure High Side Design Pressure Low Side Insulation Blowing Gas** Refrigerant

115V
60Hz
730W
8.6A
64.80 cu ft
4-5
1
300 PSIG
150 PSIG
C-Pentane
R290/5.22 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D83AR	82 5/8 x 34 1/4 x 80 1/4	84 1/4 x 35 1/4 x 82 1/4	595 lbs	12	13















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



info@dukersusa.com

www.DukersUSA.com