

D83R-GS3

Bottom Mounted / 3 Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2 + Nema Config. NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- ometes faster Refrigerant promotes faster R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- [] Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com


www.DukersUSA.com


DETAILS & SPECIFICATIONS

D83R-GS3

Side View

Front View

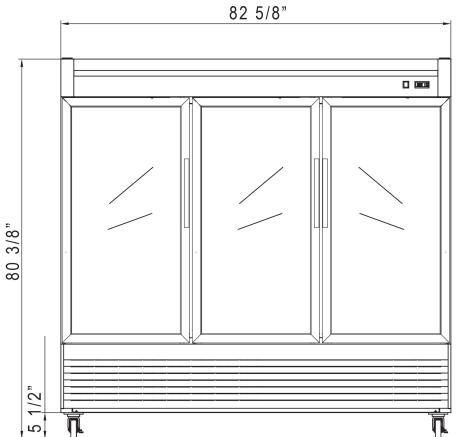

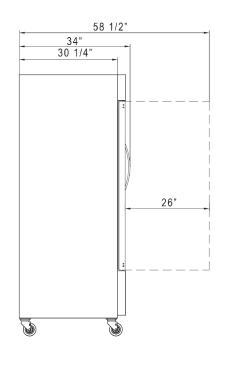

MODEL D83R-GS3

Rated Voltage 115V Rated Frequency 60Hz 730W **Total Input Power Total Current** 8.6A 64.80 cu ft **Total Capacity Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG** 150 PSIG **Design Pressure Low Side Insulation Blowing Gas** C-Pentane R290/5.22 oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
D83R-GS3	82 5/8 x 34 x 80 3/8	84 1/4 x 36 5/8 x 82 3/8	822 lbs	12	13















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com

www.DukersUSA.com