

PIZZA PREP TABLE DPP70-9-S2 2-Door





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5 Nema Config. NEMA5-15P



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **PRODUCT FEATURES**

The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.

TEARS PARTS & LA

WARRAN¹

SVEAR COMPRES

Duke


- **(B.B)** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ₩ Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- 5 deep 1/3 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕮 Lifetime warranty on hinges.
- 7 5" casters with lock for easy mobility.

HIGH QUALITY -STAINLESS STEEL & **ROBUST DESIGN**

> (1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com

DETAILS & SPECIFICATIONS

PI77A PRFP TABLE DPP70-9-S2

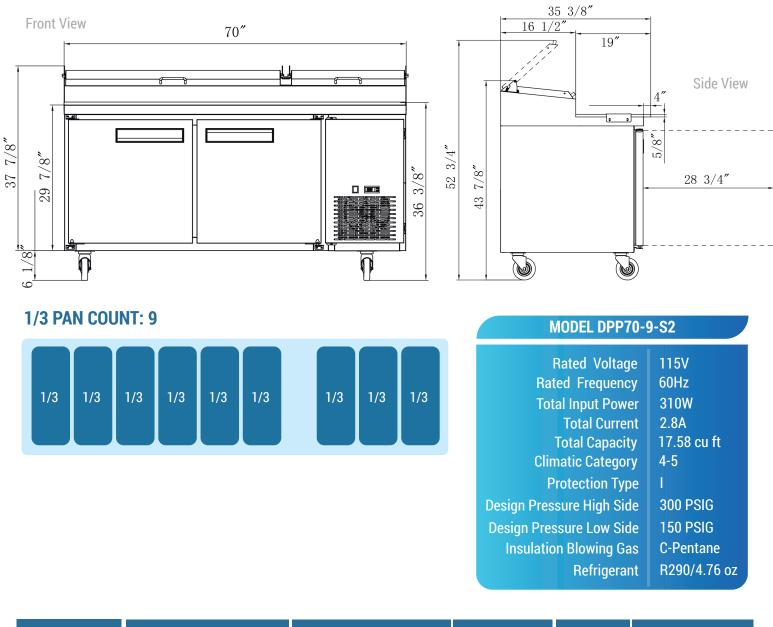

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	-	40HQ CONTAINER CERT.
DPP70-9-S2	70 x 31 1/2 x 43 7/8	71 3/8 x 35 7/8 x 48 3/8	297 lbs	2	26

Intertek

DUKERS

EFRIGERANT

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

(1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com

Intertek