

GLASS DOOR MERCHANDISER

DSM-15R

Single Glass Swing Door Refrigerator





1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interior Finish
Exterior Finish
Temperature Range °F 33 ~ 40°F
Compressor Power (HP) 1/5
Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey


(1-800-931-8628

(a) info@dukersusa.com

www.DukersUSA.com

DETAILS & SPECIFICATIONS

DSM-15R

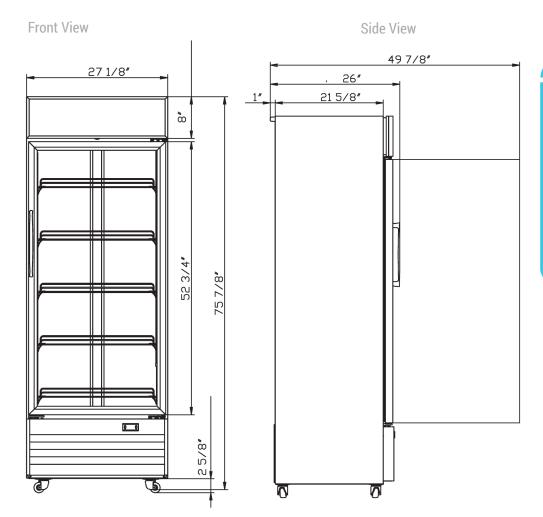

MODEL DSM-15R				
Rated Voltage Rated Frequency	115V 60Hz			
Total Input Power	260W			
Total Current Total Capacity	2.3A 14.72 cu ft			
Climatic Category Protection Type	4-5 I			
Design Pressure High Side	300 PSIG			
Design Pressure Low Side Insulation Blowing Gas	150 PSIG C-Pentane			
Refrigerant	R290/2.82 oz			

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
DSM-15R	27 1/8 x 26 x 75 7/8	29 1/8 x 27 x 77 7/8	241 lbs	5	51















