



DUKERS
Quality Commercial Refrigeration



GLASS DOOR MERCHANDISER

DSM-40SR

2-Glass Sliding Door Refrigerator



TECHNICAL SPECIFICATIONS

- Voltage/Frequency
115V/60Hz
- Refrigerant
R290
- Type of Defrost
Automatic
- Interior Finish
White
- Exterior Finish
Black
- Temperature Range °F
33 ~ 40°F
- Compressor Power (HP)
1/2 & 1/4
- Nema Config.
NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628


@ info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

DSM-40SR

Front View

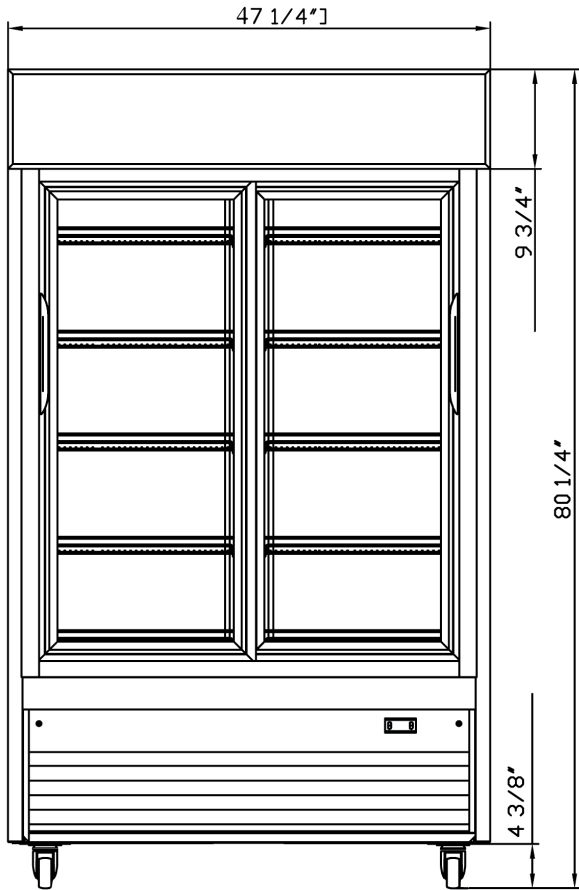

Side View

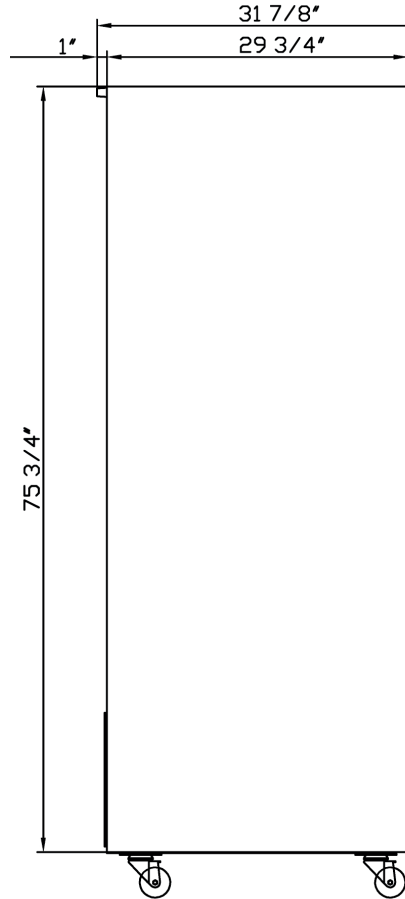

MODEL DSM-40SR

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	690W
Total Current	9.2A
Total Capacity	39.00 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-40SR	54 1/8 x 31 7/8 x 80 3/8	48 5/8 x 33 x 83 1/4	363 lbs	10	23



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com