



GLASS DOOR MERCHANDISER

DSM-41R

2-Door / Glass / Swing / Refrigerator



i TECHNICAL SPECIFICATIONS

- Voltage/Frequency
115V/60Hz
- Refrigerant
R290
- Type of Defrost
Automatic
- Interior Finish
White
- Exterior Finish
Black
- Temperature Range °F
33 ~ 40°F
- Compressor Power (HP)
1/2-
- Nema Config.
NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

DSM-41R

Front View

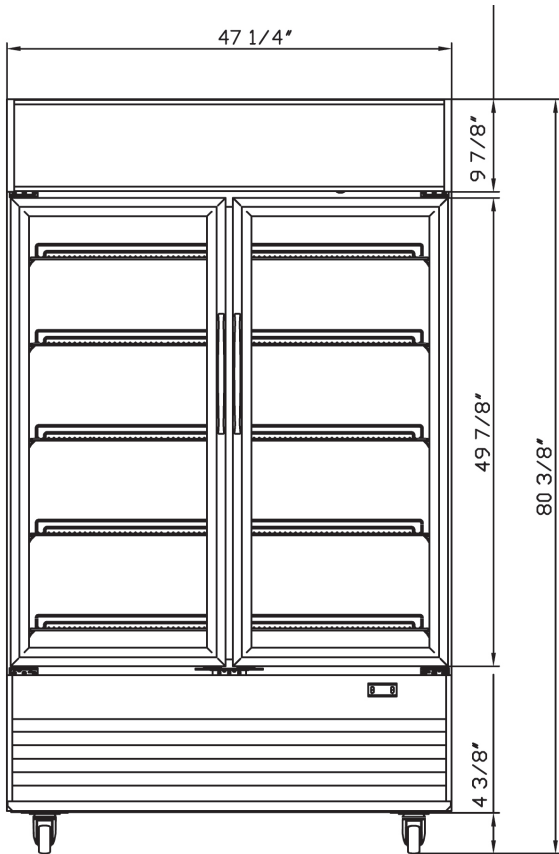

Side View

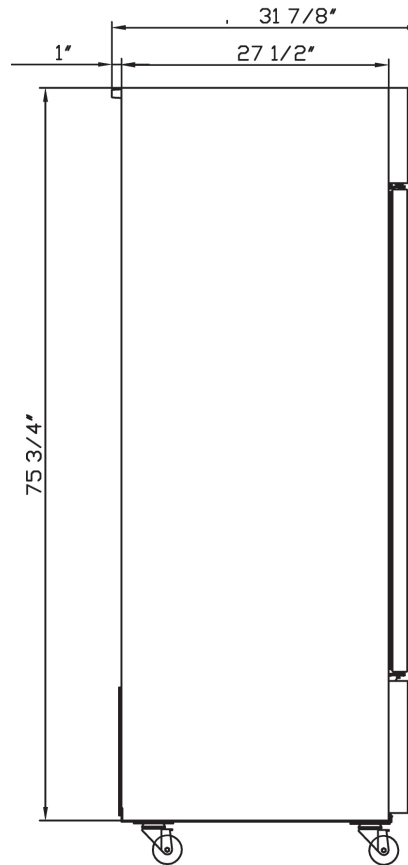

MODEL DSM-41R

| | |
|---------------------------|--------------|
| Rated Voltage | 115V |
| Rated Frequency | 60Hz |
| Total Input Power | 690W |
| Total Current | 8.8A |
| Total Capacity | 41.28 cu ft |
| Climatic Category | 4-5 |
| Protection Type | I |
| Design Pressure High Side | 300 PSIG |
| Design Pressure Low Side | 150 PSIG |
| Insulation Blowing Gas | C-Pentane |
| Refrigerant | R290/2.82 oz |

| MODEL | EXTERNAL DIMENSION WXDXH (INCHES) | PACKAGING DIMENSION WXDXH (INCHES) | PRODUCT NET WEIGHT | # OF SHELVES | 40HQ CONTAINER CERT. |
|---------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| DSM-41R | 47 1/4 x 31 7/8 x 80 3/8 | 49 1/4 x 32 7/8 x 82 3/8 | 363 lbs | 5 | 23 |



AutoQuotes



115/60/1
NEMA-5-15P



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com