12" X 20" INSULATED WARMER

MODELS: W-3Vi



The APW Wyott W-3Vi countertop warmer is perfect for holding pre-cooked foods at NSF safe temperatures. These units can be used with a variety of pan sizes or adapter plates for round insets. Serpentine shaped heating elements ensure heat is distributed evenly. 1-inch insulation keeps heat in the product and protects countertops. Thermostatic controls and knob guards are standard.

OPTIONS

- Adapter plate with 2 holes for two 11 qt. insets
- Adapter plate with 3 holes for three 7 qt. insets
- Adapter plate with 4 holes for four 4 qt. insets

WARRANTY

APW Wyott Warming Equipment is backed by a 1-year Parts and Labor warranty, including our "Enhanced Warranty" service that replaces new units with certain product issues through the convenience of direct factory shipments.

CERTIFICATIONS

Certified by the following agencies:


W-3Vi FEATURES AT A GLANCE

- 22 quart capacity
- Designed to cook and hold precooked foods at NSF safe temperatures.
- Serpentine shaped heating elements that evenly distribute heat throughout the unit
- Steel element support stabilizes heating elements and reflects heat toward well
- Model is provided with knob guards
- 1-inch fiberglass insulation
- 1/2" rubber legs
- Heavy-duty stainless steel for long life
- Easy to clean.
- Thermostatically controlled
- Great for buffets, serving lines, back bars or back-of-the-house
- Pans and insets not included
- Wet use only

12" X 20" INSULATED WARMERS

MODELS: W-3Vi

EQUIPMENT DIMENSIONS

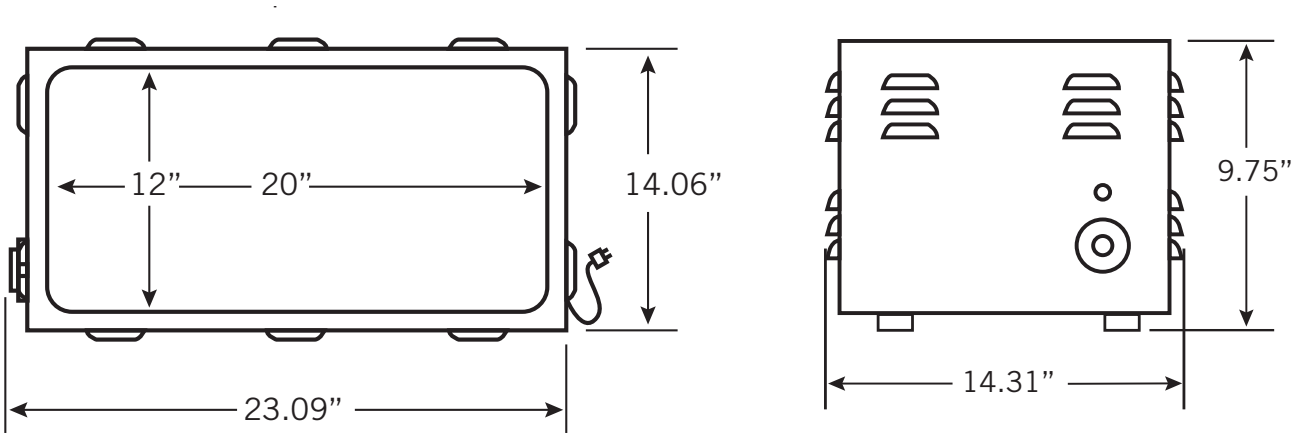

MECHANICAL SPECIFICATIONS

Model #	Volts	Watts	NEMA Plug	Amps	Overall Dimensions Width x Height* x Depth** inches (mm)	Capacity Quarts	Ship Weight (lbs. / Kilos)
W-3Vi	120	1,200	5-15P	10	14.31” x 9.75” x 23.09” (363 x 248 x 590)	22	21 lbs. (9.52 kg)
W-3Vi	208/240/277	900/1,200/1,600	6-15P	4.3/5.0/5.7	14.31” x 9.75” x 23.09” (363 x 248 x 590)	22	21 lbs. (9.52 kg)

*Height includes .5" rubber legs. **Depth includes control knob.

ELECTRICAL INFORMATION

Each unit is equipped with a 60” three wire grounded power cord which terminates with a standard three pronged male plug. The 120V unit uses a NEMA 5-15 plug. The 240V unit uses a NEMA 6-15P 90˚ plug.

REQUIRED CLEARANCES

	Combustible
Left	N/A
Right	N/A
Back	N/A

Freight Class: 100
FOB: Smithville, TN 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.