

# LARGE HOT WATER DISPENSERS

## WH SERIES LARGE HOT WATER DISPENSERS

Project

Date

Models

**WHT30**  
**WHT45**

Item #

Quantity



**Model WHT30**



**Model WHT45**

## Features

- WHT Hot Water Dispensers provide an inexhaustible supply of hot water that is held at a constant temperature from 140°F up to 208°F. 11.90 and 17.8-gallon models are available with tap operated dispense.
- 316L Stainless Steel Tank. More robust than other steel and resilient in variable water conditions.
- Reduced radiated heat loss from tank due to minimal metal to metal contact and insulation material.
- Minimized buffer volume below the tap/unusable water.
- Adjustable temperature with excellent temperature control.
- Easy to descale.
- Made from 95% recyclable materials.
- NSF and cULus listed.

### Hands-Free Tap Adapter (optional):


- Simple to install.
- Easily operated with an elbow or cup.
- Curved adapter reduces risk of cup lip touching tip.



0322 WHT30-45

# LARGE HOT WATER DISPENSERS

## WH SERIES LARGE HOT WATER DISPENSERS

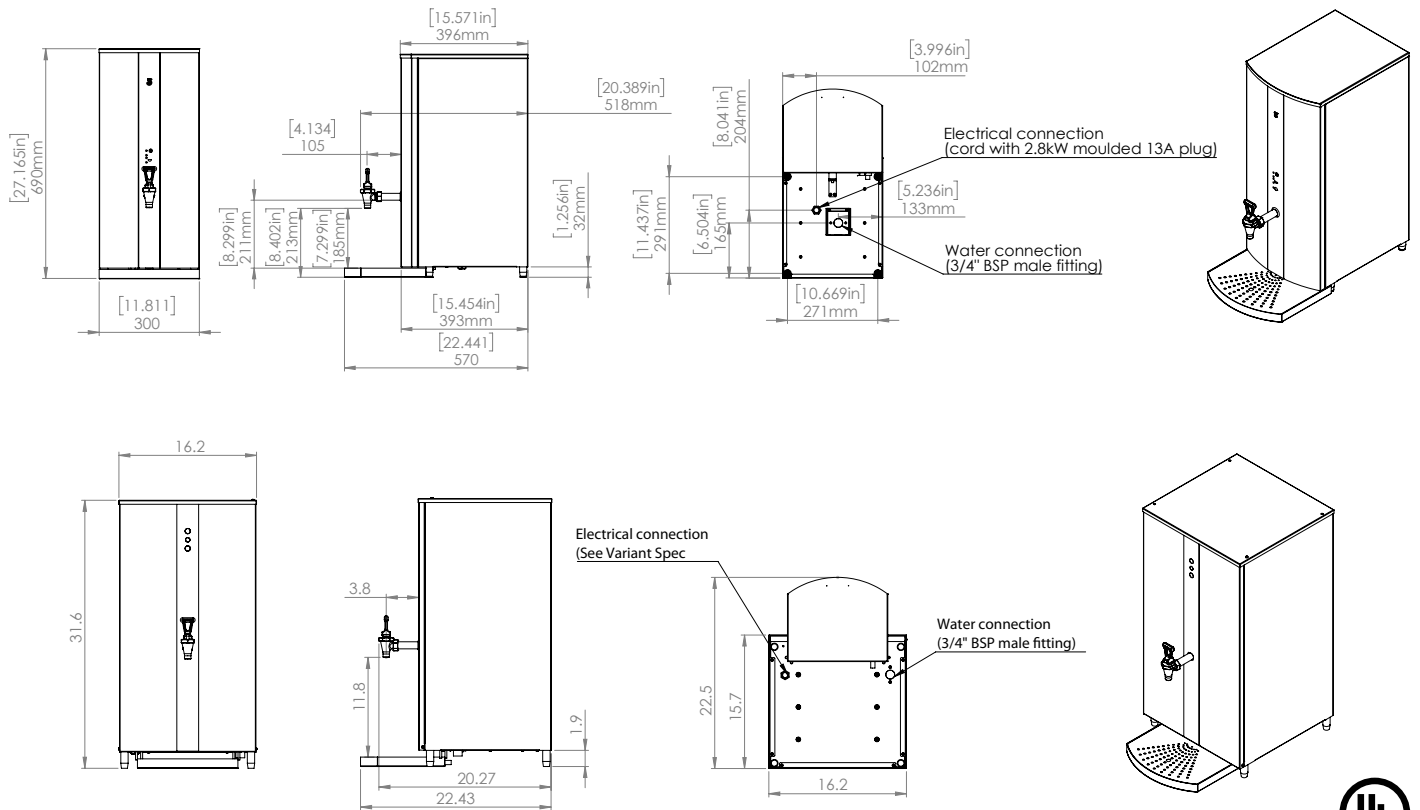

Model WHT represented: WHT30, WHT45



### WHT Tap Operated Hot Water Dispensers

MODEL	DESCRIPTION	GPH OUTPUT @160°F ΔT	INITIAL DRAW CAPACITY gallons	PRODUCT DIMENSIONS (H X W X D)
<b>WHT30</b> (2403-009)	11.90 gallon, 120V/1PH/60HZ, 1.5 kW - NEMA 5-15P	3.7	9.7	27.2" x 11.8" x 22.5"
<b>WHT30</b> (2403-010)	11.90 gallon, 240V/1PH/60HZ, 5.8 kW - NEMA L6-30P	14.5	20.5	27.2" x 11.8" x 22.5"
<b>WHT45</b> (2403-011)	17.8 gallon, 120V/1PH/60HZ, 1.5 kW - NEMA 5-15P	3.7	12.6	31.5" x 16.1" x 20.3"
<b>WHT45</b> (2403-012)	17.8 gallon, 240V/1PH/60HZ, 6.1 kW - NEMA L6-30P	15.2	24.1	31.5" x 16.1" x 20.3"
<b>WHT45</b> (2403-013)	17.8 gallon - 208V/3PH/60HZ, 6.9 kW - <b>Hard wired cord</b>	17.2	26.1	31.5" x 16.1" x 20.3"

### Accessory for WHT Hot Water Dispensers

MODEL	DESCRIPTION	PRODUCT DIMENSIONS (H X W X D)
<b>410-00842</b>	Hands-Free Tap Adapter Specially-designed curved adapter reduces the risk of contact between the cup lip and the tap.	6.1" x 2.7" x 1.4"